COS-E SERIES™
Residential Fan-Forced Zonal Wall Heater





Technical Specifications:

Temp Range: 45°–135°F
CFM: 65
Grille Gauge: 20

Ideal Spaces:

Bedrooms
Living/Family Room
Kitchens
Basements
Offices
Conference Rooms
Waiting Rooms

White

- Contemporary look and compact size ideal for new residential or commercial installations where space is limited
- Patented CLIP-N-FIT® feature allows installer to change the desired wattage output without moving the jumper wire
- Dual Protection: self-hold limit to protect against overheating, with a one-time thermal fuse backup
- Dual voltage and wattage ratings help reduce inventory levels
- Heater/Fan Assembly fits into back box with a single screw for quick installation and easy service
- Built-in double-pole thermostat with positive OFF position, or a remote, wall mounted thermostat provides localized room control
- Multi-layer impeller provides quiet operation

Intertek

5 YEAR WARRANTY ELEMENT

1 YEAR WARRANTY WORKMANSHIP

COS-E SERIES™
Residential Fan-Forced Zonal Wall Heater

Scan the QR code to access additional specs and features

Models & Specifications:

	ITEM INFORMATION		ELECTRICAL DATA						
	CATALOG NO.	UPC	VOLTS (1)	VOLTS (2)	WATTS (1)	WATTS (2)	AMPS (1)	AMPS (2)	SHIP WT.
◆	CZ1512T*	685360161648	120	—	1500/750	—	12.5/6.3	—	11 lbs
◆	CZ1012T	685360161655	120	—	1000/500	—	8.4/4.2	—	8.1 lbs
◆	CZ1048T	685360161631	208	240	750/375	1000/500	7.2/3.6	8.4/4.2	11 lbs
◆	CZ1548T	685360161624	208	240	1125/570	1500/750	5.4/2.7	6.3/3.2	5.6 lbs
◆	CZ2048T*	685360161617	208	240	1500/750	2000/1000	3.6/1.8	4.2/2.1	11 lbs

SKU Legend: ◆ **= Popular Products;** ● **= Extended Offering** (Contact your local Marley Sales Representative for typically associated lead times)
*Available in pallet quantities.

Optional Accessories:

CATALOG NO.	UPC	DESCRIPTION	COLOR	SHIP WT.
CZTDP	685360163321	Double-Pole Built-in Thermostat Kit (Range: 45–135°F)	White	1 lbs
CZSM	685360163352	Surface Mounting Frame	White	2 lbs
CZ2CRAKIT	685360165196	Retrofit Kit CRA to COS-E	White	2 lbs

Dimensions and Clearances:

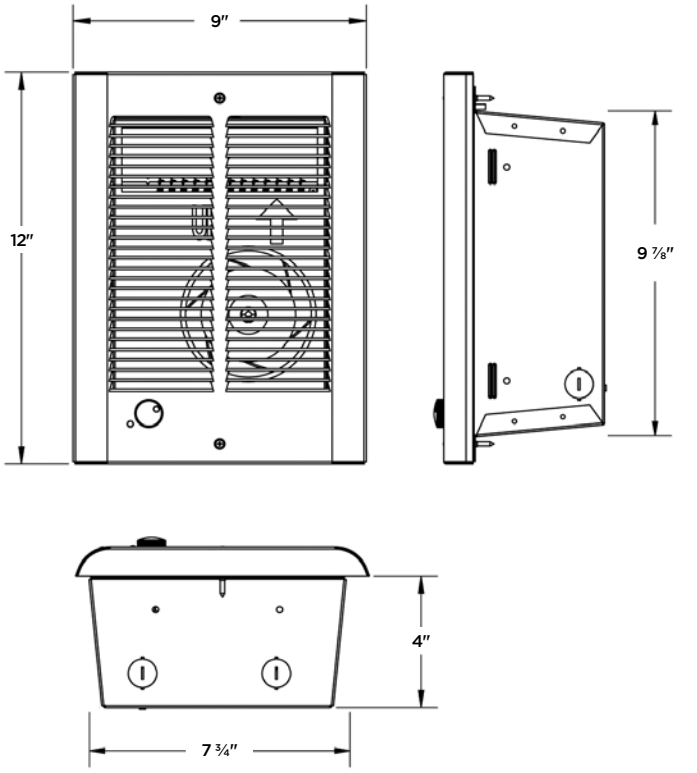

Suggested Controls



TH106A M601W