

Marley
Industrial Products

PROJECT	ENGINEER	SUBMITTED BY
DATE	ARCHITECT	NOTES:
SHEET OF	CONTRACTOR	NOTES:

FRONT

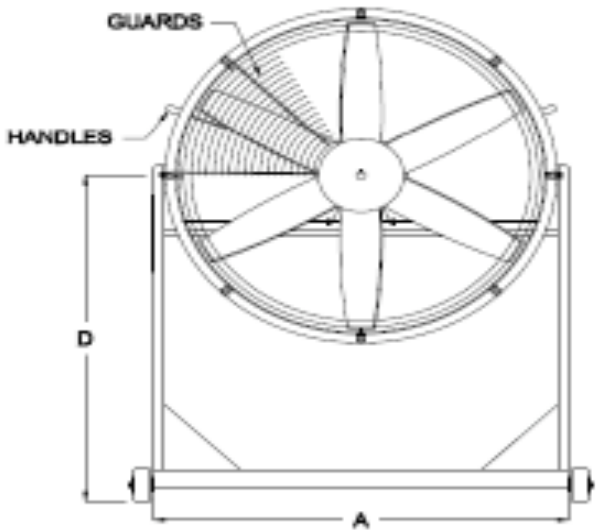

LEFT SIDE

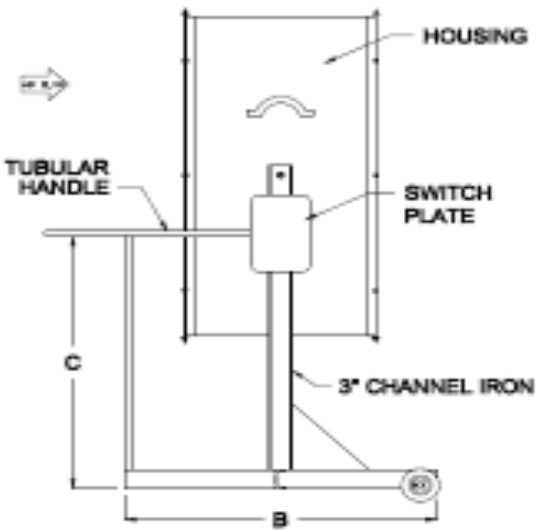

BLADE	A	B	C	D
18"	23"	30"	25"	42"
24"	29"	30"	25"	42"
30"	35"	30"	25"	42"
36"	41"	30"	25"	42"
42"	47"	30"	25-1/2"	42"
48"	53"	30"	25-1/2"	42"

Specifications:

18" to 48" sizes available with 115/230V, 60HZ, 1PH or 230/460V, 60HZ, 3PH totally enclosed or explosion motors.

Non-sparking cast aluminum blades.

Rugged, heavy duty 14 gauge steel body with industrial grey enamel coating.

360 degree swivel stand.

Meets Federal OSHA requirements.

1 year limited warranty.

Options Available:

Acid resistant coating and manual starter switch.
Call factory. Add EXP suffix to model number when ordering explosion proof models.

ITEM	QTY.	MARK	MODEL NUMBER	BLADE DIA.	TOTAL HEIGHT	MOTOR HP	VOLTS	PHASE	MOTOR TYPE TE / EXP	RPM	CFM @ 0" SP	APPROX. WEIGHT

DIRECT DRIVE HIGH STAND MAN-COOLERS *SUBMITTAL SHEET*