# HUHTA/ST SERIES
## Bundled Horizontal/Downflow Unit Heater





### *Technical Specifications*:

**Temp Range**: 45°–90°F
**CFM**: 270

### *Ideal Spaces*:

Factories
Garages
Stockrooms
Stores
Maintenance Rooms
Warehouses
Service Stations
Workshops
Stairwells

Beige

- Heater comes equipped with ceiling-mount bracket for horizontal or vertical flow mounting or any position in between
- Built-in single-pole thermostat
- Copper-brazed steel fins with steel sheathed tubular elements for uniform heating and longevity
- Adjustable louvers control air throw direction
- Automatic fan delay eliminates cold drafts on start-up and discharges residual heat from the heater body during shut down
- High limit cut-off with visual alarm automatically shuts off current in event of overheating and reactivates unit when temperature returns to normal
- Disconnect switch (DS30) option available for heaters 24 amps or lower.

c UL us

5 YEAR WARRANTY ELEMENT

1 YEAR WARRANTY WORKMANSHIP

# HUHTA/ST SERIES
## Bundled Horizontal/Downflow Unit Heater

**Scan the QR code to access additional specs and features**


### *Models & Specifications:*

| | ITEM INFORMATION | | ELECTRICAL DATA | | | | |
|---|---|---|---|---|---|---|---|
| | CATALOG NO. | UPC | VOLTS | WATTS | BTU/HR. | HEATER AMPS | SHIP WT. |
| ◆ | HUH524TA | 685360038803 | 208 | 1874 | 6396 | 9 | 24 lbs |
| | | | | 2500 | 8553 | 12 | |
| | | | | 3123 | 10659 | 15 | |
| | | | | 3750 | 12799 | 18 | |
| | | | 240 | 2500 | 8533 | 10.4 | |
| | | | | 3332 | 11365 | 13.9 | |
| | | | | 4165 | 14215 | 17.4 | |
| | | | | 5000 | 17065 | 20.9 | |
| ◆ | HUH724ST | 685360148700 | 208 | 2812 | 9598 | 13.5 | 27 lbs |
| | | | | 3750 | 12799 | 18 | |
| | | | | 4685 | 15990 | 22.5 | |
| | | | | 5625 | 19198 | 27.1 | |
| | | | 240 | 3750 | 12799 | 15.6 | |
| | | | | 5000 | 17065 | 20.8 | |
| | | | | 6250 | 21331 | 26 | |
| | | | | 7500 | 25598 | 31.3 | |


**SKU Legend:** ◆ **= Popular Products;** ● **= Extended Offering** (Contact your local Marley Sales Representative for typically associated lead times)

NOTE: Disconnect switch (DS30) option available for heaters 24 amps or lower. Units come factory wired to higher wattages. Additional wattages can be achieved with field rewiring per instruction manual.

### *Controls and Accessories:*

| | CATALOG NO. | DESCRIPTION |
|---|---|---|
|  | DS30 | 3-pole power disconnect switch for field installation on all heaters. Complies with "positive off" requirements. |
|  | CWB1A | Wall mounting brackets for all units. (Ceiling mounting bracket is included with all heaters.) |

### *Dimensions and Clearances:*

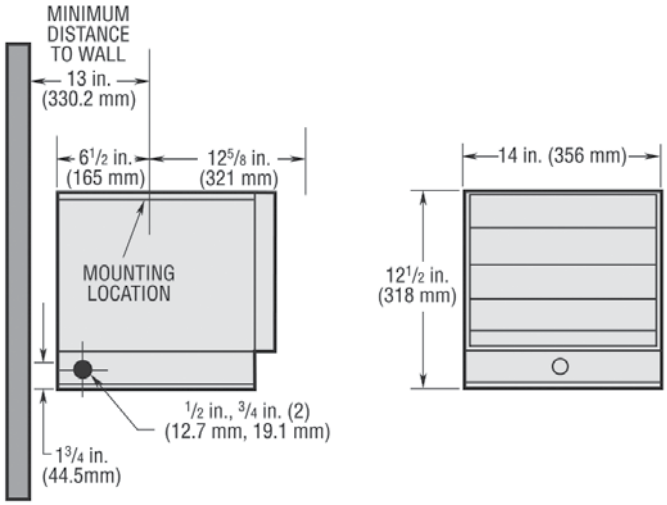




## Limited space? We've got your customized comfort covered.

Choose the **HUH Series Horizontal/Downflow Unit Heater** for basic heating or the HUHTA/ST Bundle with an included mounting bracket and built-in thermostat for one-stop-shopping. Both have adjustable louvers and flexible mounting options that enable you to take aim at the cold. Best of all, both heaters will keep your coldest spots warm and comfortable for years to come.