
Marley Industrial Products

PROJECT	ENGINEER	SUBMITTED BY
DATE	ARCHITECT	NOTES:
SHEET OF	CONTRACTOR	NOTES:

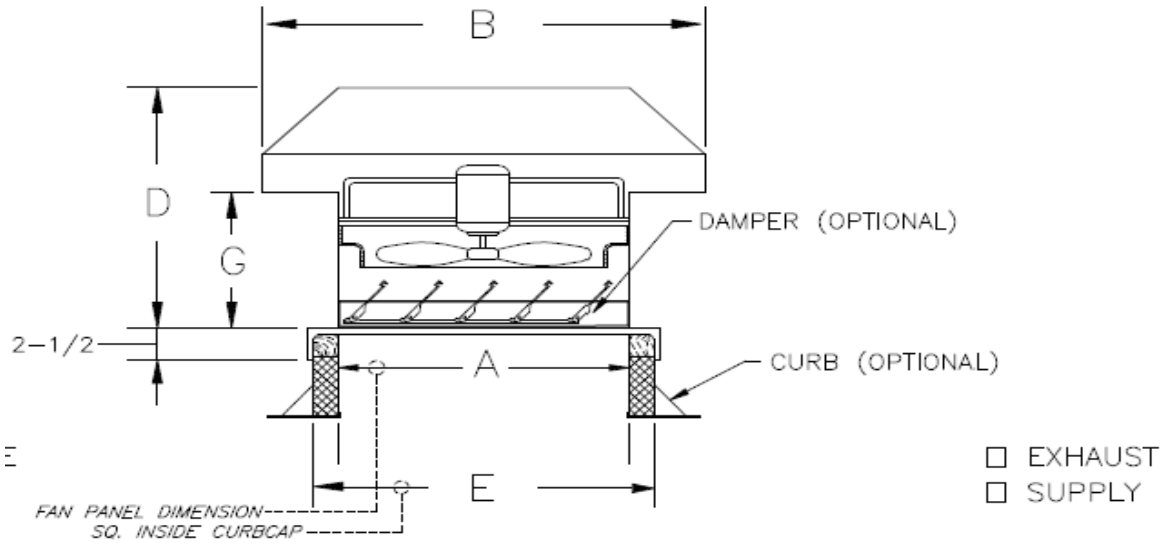

Specifications:
24" to 60" sizes available with 115/230V, 1PH or 230/460V, 3PH belt drive industrial quality motors, factory assembled and tested.

Standard blade is heavy gauge steel.

Heavy industrial steel base with aluminum hood.

Self aligning pillow block bearings with locking collars.

Bird screen included at top of housing.

Accessories:
Flat, slope or ridge style insulated roof curbs, back draft dampers and filters.

Options Available:
Non-sparking cast aluminum blades with static free belts for explosion proof requirements. Protective coatings and variable pitch pulleys. (Consult Factory)

Fan Size	A	B	D	E	G
24"	30"	54"x64"	41-1/2"	39"	25-1/2"
30"	36"	60'x76"	14-1/2"	45"	25-1/2"
36"	42"	72"x82"	45-1/2"	51"	27-1/2"
42"	48"	80"x89"	45-1/2"	57"	27-1/2"
48"	54"	87"x95"	49-1/2"	63"	29-1/2"
54"	60"	92"x98"	50-1/2"	69"	29-1/2"
60"	66"	90"x107"	54-1/2"	75"	31-1/2"

Note: When ordering, add suffixes as follows: Exhaust = E; Intake = I

ITEM	QTY.	MARK	MODEL NUMBER	FAN SIZE	EXHAUST / SUPPLY	MOTOR HP	VOLTS	PHASE	MOTOR TYPE TE / EXP	RPM	CFM @ 0" SP	APPROX. WEIGHT

HVD BELT DRIVE HOODED ROOF VENTILATORS SUBMITTAL SHEET