PROJECT: _____ **ITEM NO.:** _____

CONTROL CENTER MODEL MRS

3-BUTTON • MANUAL REVERSE

SPECIFICATIONS

- 3-button switch with FWD/STOP/REV
- Stainless steel construction
- NEMA 4
- Manual reverse allows increased cutting element life and reduces jams
- Magnetic starter/provides automatic shut-off in case of power interruption
- Operates on line voltage



1 YEAR ON-SITE PARTS & LABOR WARRANTY

VOLTAGE/PHASE AVAILABILITY

Model	Voltage/Hz	Phase	Disposer Models
MRS-14	120V, 50/60 Hz	1 Ph	SS-100 to SS-200
MRS-15	208-240V, 50/60 Hz	1 Ph	SS-100 to SS-200
MRS-16	208-240V, 50/60 Hz	3 Ph	SS-100 to SS-1000
MRS-17	380-460V, 50/60 Hz	3 Ph	SS-100 to SS-1000

RECOMMENDED INSTALLATION

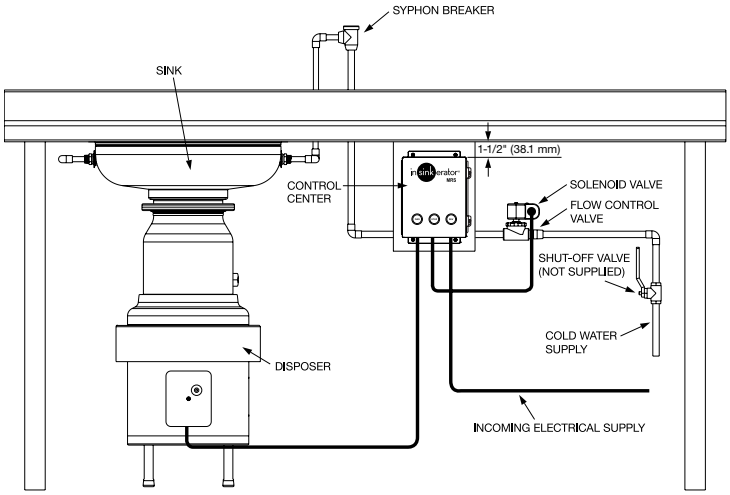

NOTE: The MRS control center should be mounted 1-1/2" (38.1 mm) back from the front surface of the table.

DIMENSIONS

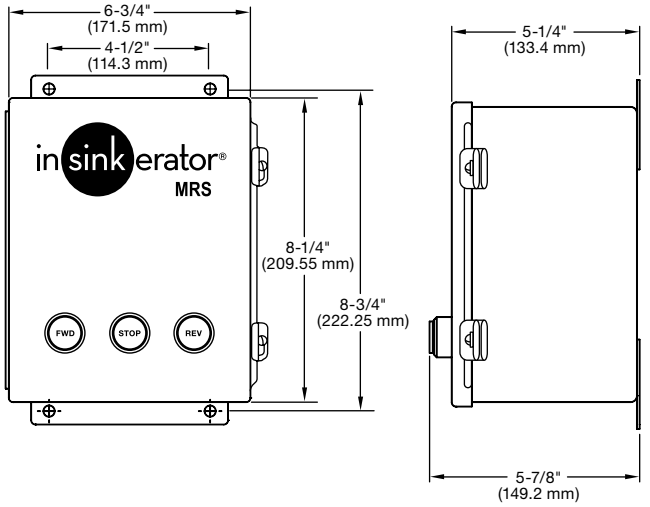

A complete collection of our product drawings is available for download at the **InSinkErator Revit/CAD** Library, which can be found at www.insinkerator.com/foodservice. Product information is also accessible on ***The KCL CADalog***. More information is available from KCL at www.kclcad.com.

1250 International Drive
Mount Pleasant, WI 53177
TEL: 800-845-8345

www.insinkerator.com/foodservice

c UL us LISTED ISO 9001 QUALITY SYSTEMS CERTIFIED

InSinkErator ©2023 Printed in USA Form No. F453-23C-83-85