PROJECT: _____ **ITEM NO.:** _____

CONTROL CENTER MODEL MS

SINGLE DIRECTION

SPECIFICATIONS

- Single direction only
- Push button ON/OFF switch
- High impact polycarbonate construction
- NEMA 4
- Magnetic starter/provides automatic shut-off in case of power interruption
- Operates on line voltage



1 YEAR ON-SITE PARTS & LABOR WARRANTY

VOLTAGE/PHASE AVAILABILITY

Model	Voltage/Hz	Phase	Disposer Models
MS-7	120V, 50/60 Hz	1 Ph	SS-100 to SS-200
MS-8	208-240V, 50/60 Hz	1 Ph	SS-100 to SS-200
MS-9	208-240V, 50/60 Hz	3 Ph	SS-100 to SS-1000
MS-10	380-460V, 50/60 Hz	3 Ph	SS-100 to SS-1000

RECOMMENDED INSTALLATION

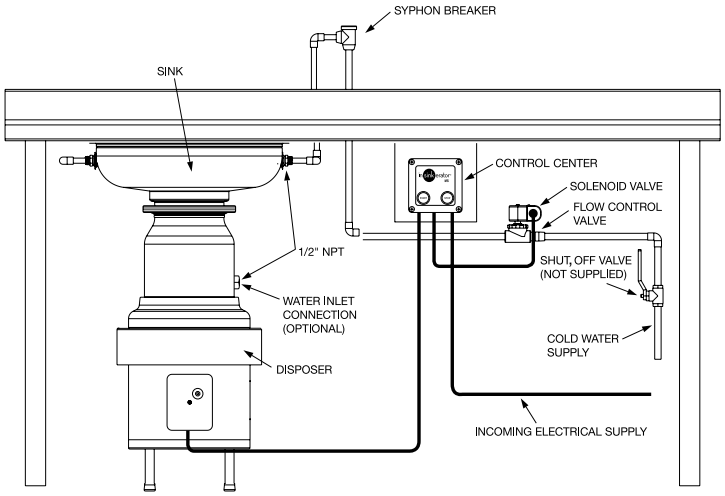

DIMENSIONS

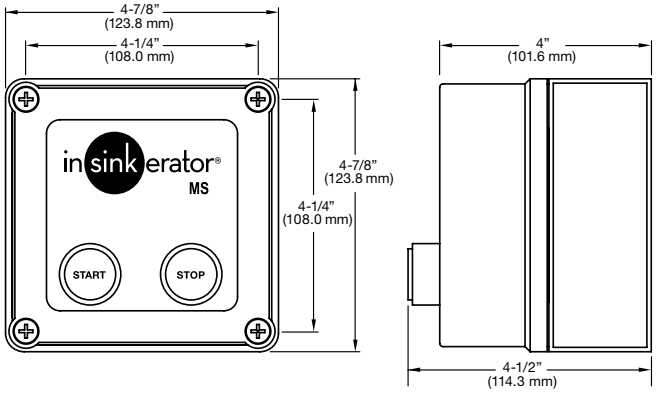

NOTE: Use a #8 screw to mount control.

A complete collection of our product drawings is available for download at the **InSinkErator Revit/CAD** Library, which can be found at www.insinkerator.com/foodservice. Product information is also accessible on ***The KCL CADalog***. More information is available from KCL at www.kclcad.com.

1250 International Drive
Mount Pleasant, WI 53177
TEL: 800-845-8345

www.insinkerator.com/foodservice

c UL us LISTED ISO 9001 QUALITY SYSTEMS CERTIFIED

InSinkErator ©2023 Printed in USA

Form No. F452-23C-83-85