Marley® Engineered Products


MEP-ESA-RG

End Seal Kit

Installation, Operation & Maintenance Instructions


TOOLS REQUIRED:
Diagonal cutters; needle-nose pliers; utility knife; heat gun or propane torch

KIT CONTENTS:
(5) - Black heat-shrink tubes ½" x 1 ½"
(5) - Black heat-shrink tubes 3/4" x 4"

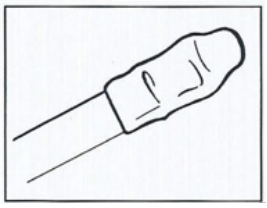


IMPORTANT INSTRUCTIONS


1 Strip outer jacket as shown. Do not cut into inner jacket

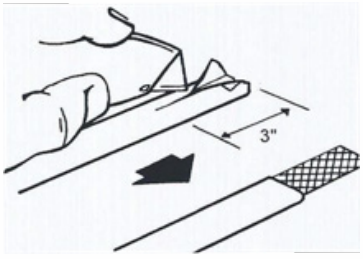


2 Unravel ground braid and trim 1 1/2" at outer jacket; cut back.

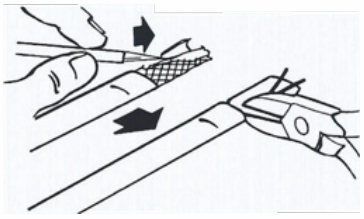

3 Heat-shrink 1"2" heat-shrink tube in place with 3/8" over end of heating cable. Remove heat. Squeeze end with needle-nose pliers. Hold for 10 to 15 seconds.

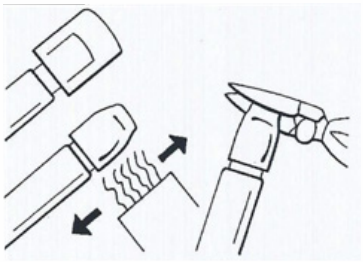

4 Heat-shrink 3/4" x4" heat-shrink tube in place with 3/8" over end of smaller heat-shrink tube. Remove heat, resqueeze at end of smaller heat-shrink tube, then squeeze at end of outer heat-shrink tube. Hold for 10 to 15 seconds.

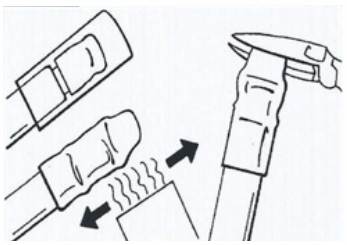

SAVE THESE INSTRUCTIONS