SSAR ARCHITECTURAL THERMOSTAT DISPLAY

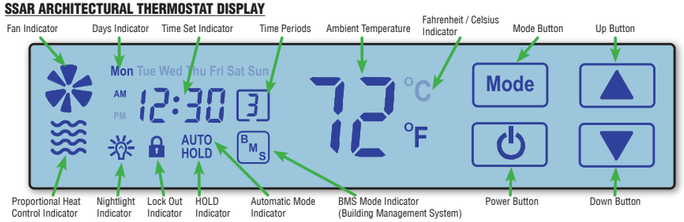

SSHO COMMERCIAL THERMOSTAT DISPLAY

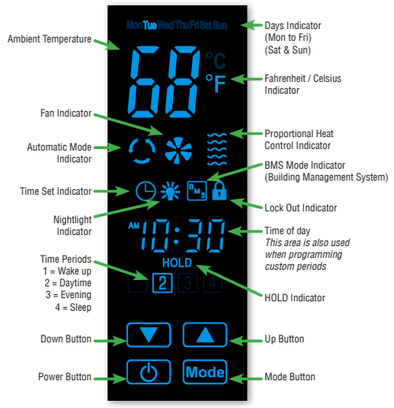

HT RESIDENTIAL THERMOSTAT DISPLAY

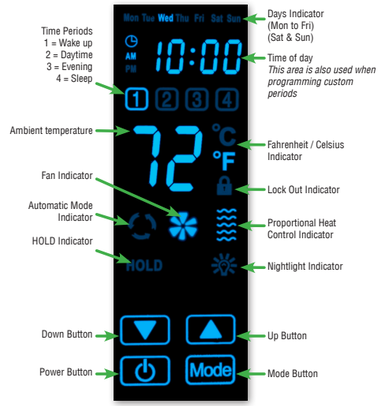

CONTACT INFORMATION

NAME

BUSINESS

ADDRESS

CITY, STATE, ZIP

PHONE

EMAIL ADDRESS

WEB

QMARK®

www.qmarkmep.com



Out Smart™
Out Perform™
Out Last™
The Competition

QMark Wall Heaters

Out Smart™ Out Perform™ Out Last™ the Competition

SmartSeries®



High Output Mechanical



Low Output Mechanical



PRICE RANGE MODEL	$$$$ SSARW	$$$ SSHO	$$ HT	$$$$ MCSSAR	$$$ AWH	$$ CWH 3000	$ LFK	$$$ CWH 1000 ARCHITECTURAL	$$ CWH 1000 COMMERCIAL	$ COS-E	$$ GFR REGISTER STYLE
VOLTS	120, 208, 240, 277	208, 240, 277	120, 240	120, 208, 240, 277	120, 208, 240, 277	120, 208, 240, 277	120, 208, 240, 277	120, 208, 240, 277	120, 208, 240, 277	120, 208, 240	120, 240 Will operate at 208 volt at 75% of rated wattages
WATTS RANGE	540 - 4,800 540-1800 for 120V models	1,800 - 4,000	200 - 2,000	900 - 4,800 Note: The 120V model is 900/1,800 Watts	1,500 - 4,800	1,500 - 4,800	1,500 - 4,800	500 - 2,000	500 - 2,000	500 - 2,000 CLIP-N-FIT®	375- 2,400 CLIP-N-FIT®
AMPS RANGE Amp Range does not include heater's maximum amp range because motor amps are not included in the calculation	4.5 - 23.1 Amp range does not include 120V model amp range	6.5 - 19.2	1.7 - 16.7	7.5 - 23.1	12.5 - 23.1	12.5 - 23.1	12.5 - 23.1	4.2 - 16.7	4.2 - 16.7	4.2 - 16.7	3.1 - 10
BTU/HR RANGE	1,843 - 16,378	6,142 - 13,649	682-6,825	3,070 - 16,378	5,118-16,378	5,118-16,378	5,118-16,378	1,706-6,824	1,706-6,824	1,706-6,824	1,279-8,189
WIRE SIZE	10 -12 AWG	10 - 12 AWG	12 - 14 AWG	10 - 12 AWG	10 - 14 AWG	10 - 14 AWG	10 - 14 AWG	12 - 14 AWG	12 - 14 AWG	10 - 12 AWG	10 - 12 AWG
PHASE	1	1	1	1	1, 3	1, 3	1	1	1	1	1
CFM	100	100	100	100	100	100	100	65	65	50	45
THERMOSTAT RANGE	41 °F - 99 °F	42 °F - 99 °F	40 °F - 99 °F	40 °F - 90 °F	40 °F - 90 °F	40 °F - 90 °F	40 °F - 90 °F	40 °F - 85 °F	40 °F - 85 °F	40 °F - 85 °F	40 °F - 85 °F
TOUCH SCREEN REMOTE CONTROL	LCD YES	LED Yes	LED Yes	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
THERMAL OVERHEAT PROTECTION	YES Manual-Reset + TCO	YES Manual-Reset	YES Manual-Reset	YES Manual-Reset + TCO	YES Manual-Reset	YES Manual-Reset	YES Manual-Reset	YES Manual-Reset + TCO	YES Manual-Reset + TCO	YES Manual-Reset + TCO	YES Manual-Reset
FAN DELAY	YES	YES	YES	YES	YES	YES	YES	YES	YES	NO	NO
POWER DISCONNECT	NO	YES	NO	YES	NO	YES	NO	YES	YES	NO	NO
BMS COMPATIBLE	YES	YES	NO	YES	YES	NO	NO	NO	NO	NO	NO
GRILLE COLOR	☐ Northern White ☐ Navajo White ☐ Aluminum ■ Bronze	☐ Northern White ■ Statuary Bronze	☐ Northern White ■ Gray	☐ Northern White ☐ Navajo White ■ Aluminum ■ Bronze	■ Statuary Bronze ☐ Northern White	☐ Northern White	☐ Northern White	■ Statuary Bronze	☐ Northern White	☐ Northern White	☐ Northern White
GRILLE DIMENSIONS	19.25"H x 15.85"W	19.19"H x 15.78"W	19.625" H X 13.69" W	19.25"H x 15.75"W	19.31"H x 15.74"W	19.31"H x 15.74"W	19.31"H x 15.74"W	12.10"H x 10.64"W	12.10"H x 10.64"W	12"H x 9"W	7.75"H x 16.92"W
WT (LBS)	26	25	23	28	25	25	23	10 - 11	10 - 11	10 - 11	10 - 11
WARRANTY	1 Year workmanship 5 Years on element	1 Year workmanship 5 Years on element	1 Year workmanship 5 Years on element	1 Year workmanship 5 Years on element	1 Year workmanship 5 Years on element	1 Year workmanship 5 Years on element	1 Year workmanship 5 Years on element	1 Year workmanship 5 Years on element	1 Year workmanship 5 Years on element	1 Year workmanship 5 Years on element	1 Year workmanship 5 Years on element
CERTIFICATION	cETLus	cETLus	cETLus	cETLus	cETLus	cETLus	cETLus	cETLus	cETLus	cETLus	cETLus

QMARK®
www.qmarkmep.com