
KCJ SERIES
Institutional Electric Convector



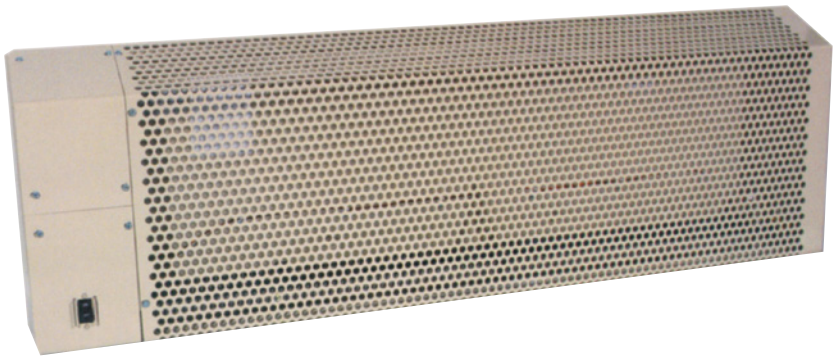

Technical Specifications:

Construction: 12 gauge Steel
DPST Thermostat Range: 55°–100° F

Ideal Spaces:

Offices
Conference Rooms
Hallways
Lobbies
Waiting Rooms
Common Areas

Beige

- Durable, tamper-resistant convection heat
- Low operating temperatures of 140°F maximum surface temperature in a 70°F ambient
- Internal, secured thermostat with 55° to 100°F range
- 12-gauge perforated steel provides rugged resistance to vandalism
- Epoxy baked enamel finish insures resistance to chipping, cracking and rusting
- Sloped top cabinet prevents objects from being set on top, which could restrict airflow
- Internal DPST disconnect switch is accessible without removing cover

c UL us

5 YEAR WARRANTY ELEMENT

1 YEAR WARRANTY WORKMANSHIP

KCJ SERIES
Institutional Electric Convector

Scan the QR code to access additional specs and features

Models & Specifications:

		ELECTRICAL DATA			
	CATALOG NO.	VOLTS	WATTS (K/W)	AMPS	SHIP WT.
■	KCJ400	120	400	3.3	40 lbs
■	KCJ408	208		1.9	
■	KCJ404	240		1.7	
■	KCJ407	277		1.4	
■	KCJ500	120	500	4.2	45 lbs
■	KCJ508	208		2.4	
■	KCJ504	240		2.2	
■	KCJ507	277		1.8	
■	KCJ750	120	750	6.3	55 lbs
■	KCJ758	208		3.6	
■	KCJ754	240		3.3	
■	KCJ757	277		2.7	
■	KCJ753	347		2.2	
■	KCJ1000	120	1000	8.3	65 lbs
■	KCJ1008	208		4.8	
■	KCJ1004	240		4.4	
■	KCJ1007	277		3.6	
■	KCJ1003	347		2.9	
■	KCJ1006	600		1.7	
■	KCJ1250	120	1250	10.4	80 lbs
■	KCJ1258	208		6	
■	KCJ1254	240		5.4	
■	KCJ1257	277		4.5	
■	KCJ1253	347		3.6	
■	KCJ1256	600		2.1	
■	KCJ1500	120	1500	12.5	95 lbs
■	KCJ1508	208		7.2	
■	KCJ1504	240		6.5	
■	KCJ1507	277		5.4	
■	KCJ1503	347		4.3	
■	KCJ1506	600		2.5	
■	KCJ2008	208	2000	9.6	
■	KCJ2004	240		8.8	
■	KCJ2007	277		7.2	
■	KCJ2003	347		5.8	
■	KCJ2006	600		3.3	

SKU Legend: ■ **= Made to Order** (Contact your local Marley Sales Representative for typically associated lead times)

Dimensions and Clearances:

WATTS	LENGTH (A)	HEIGHT	DEPTH
400	24″	16″	5″
500	28″	16″	5″
750	36″	16″	5″
1000	48″	16″	5″
1250	60″	16″	5″
1500	72″	16″	5″
2000	96″	16″	5″

NOTE: Products are made-to-order and cannot be returned.

