QCH SERIES
Ceiling-Mounted Fan-Forced Heater





Technical Specifications:

Temp Range: 45°–95°F
CFM: 65
Grille Gauge: 20

Ideal Spaces:

Basements
Offices & Lobbies
Converted Attics
Bathrooms
Workshops
Hallways & Common Areas

White

- Dual voltage and wattage
- Built-in power on/off switch
- Thermal cutout to shut off heater in case of overheating
- Easy installation with a three-piece design
- Automatic fan delay eliminates cold drafts on start-up and discharges residual heat from the heater body during shut down
- Recessed or surface installation options available
- Remote wall thermostat required

Intertek

5 YEAR WARRANTY ELEMENT

1 YEAR WARRANTY WORKMANSHIP

QCH SERIES
Ceiling-Mounted Fan-Forced Heater

Scan the QR code to access additional specs and features

Models & Specifications:

	ITEM INFORMATION		ELECTRICAL DATA			
	CATALOG NO.	UPC	VOLTS	WATTS	AMPS	SHIP WT.
◆	QCH1101F	685360165028	120	1000	8.3	10 lbs
				500	4.7	10 lbs
◆	QCH1151F	685360165035	120	1500	12.5	10 lbs
				750	6.3	10 lbs
◆	QCH1202F	685360165042	240/208	2000/1500	8.3/7.2	10 lbs
				1000/750	4.2/3.6	10 lbs
◆	QCH1207F	685360165059	277/240	2000/1500	7.2/6.3	10 lbs
				1000/750	3.6/3.1	10 lbs


SKU Legend: ◆ **= Popular Products;** ● **= Extended Offering** (Contact your local Marley Sales Representative for typically associated lead times)
NOTE: Factory-wired for highest wattage, field-convertible to lower wattages.


Optional Accessories:

CATALOG NO.	UPC	DESCRIPTION	COLOR	SHIP WT.
QCHSM	685360058726	Surface mounting sleeve	White	2 lbs
QCHS1	685360058733	1 in. Semi-Recessed Frame	White	
QCHS2	685360058740	2 in. Semi-Recessed Frame	White	
QCHTBF	685360087382	T-Bar Frame Kit	White	5 lbs

NOTE: Requires two separate leads from heater to single-pole wall thermostat.

Dimensions and Clearances:

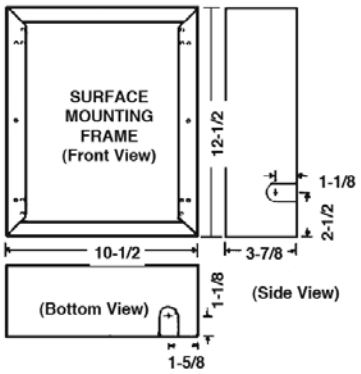



Suggested Controls



MS26 or M601W