Model No. CC-101K

Control Center - Foodservice Disposers

Engineering Number:
15254 Series

Start Date: 01/15

15254 CC-101K-5 = 120 Volt / 1/2-2 HP / 1 Phase
15254A CC-101K-6 = 208-240 Volt / 1/2-2 HP / 1 Phase
15254B CC-101K-7 = 208-240 Volt / 1/2-10 HP / 3 Phase
15254C CC-101K-8 = 380-460 Volt / 1/2-10 HP / 3 Phase

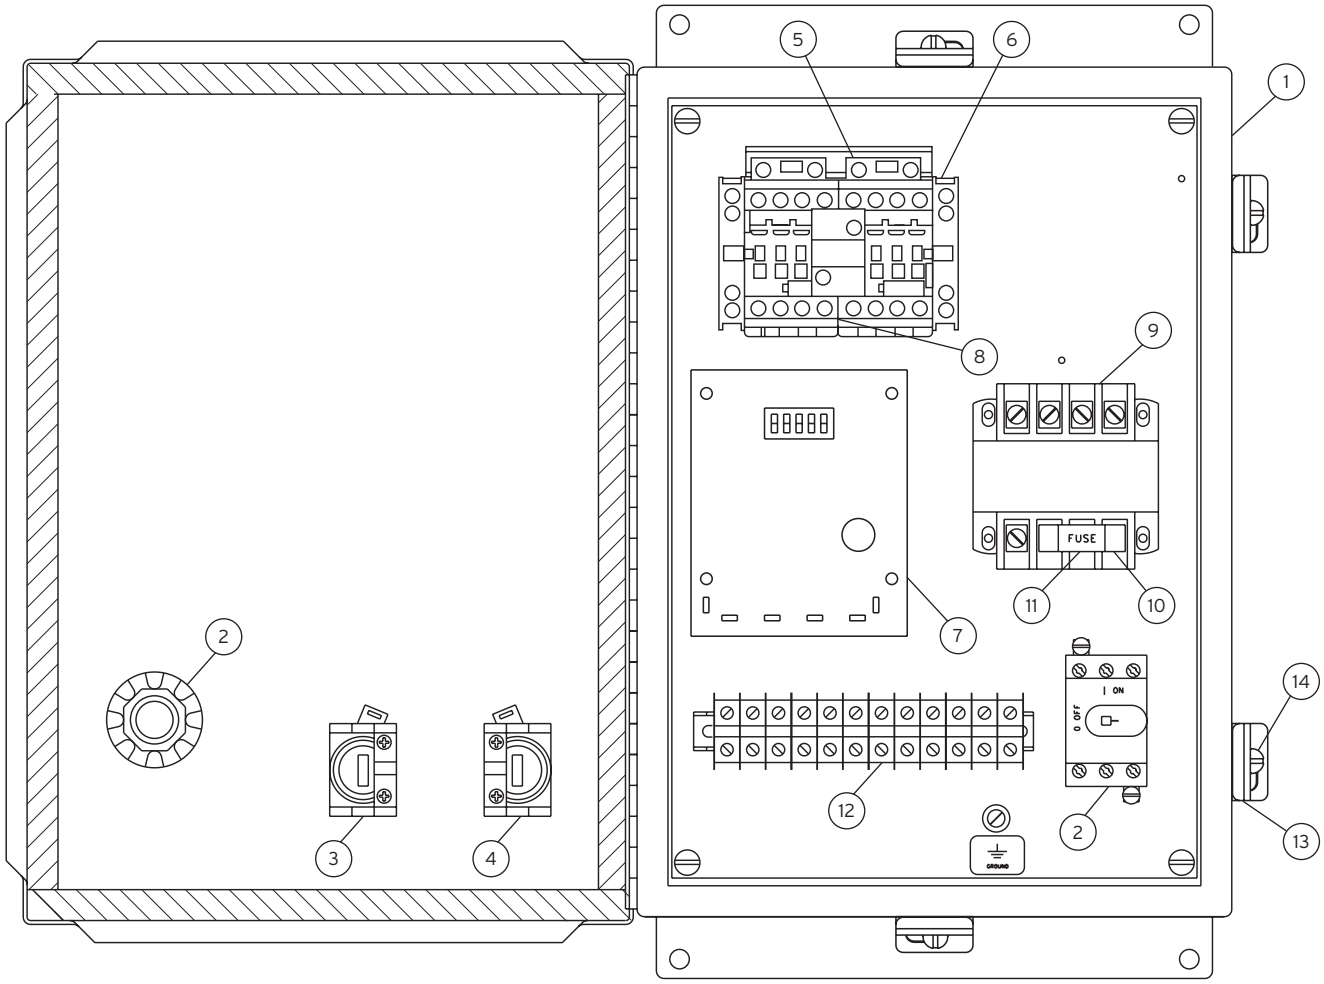

Order By Part Number, Not Code Number

CODE #	PART #	QTY	DESCRIPTION
1	N/A	1	Stainless Steel Enclosure
2	14728	1	Door Disconnect Kit Pushbutton
3	14158	1	Stop (N.C. Red) Pushbutton Start
4	14159	1	(N.O. Black) Reversing
5	15262	1	Reversing Contactor - (CC-101K-5*)
	15263	1	Reversing Contactor - (CC-101K-6*)
			*(Includes Code 6)
	15264	1	Reversing Contactor - (CC-101K-7)
	15265	1	Reversing Contactor - (CC-101K-8)
6	14163	2	Auxilary Contact Block (1 Phase Only)
7	14395	1	Circuit Board, Printed
8	15285	1	Interlock Set
9	14185	1	Transformer - 3 Phase Transformer
	14161	1	- 1 Phase

CODE #	PART #	QTY	DESCRIPTION
10	14165	2	Fuse Holder
11	13466	1	Fuse (2 Amp - 125 Volts)
		1	(FNA-2 or FNM-2)
12	16190-ISE	1	Terminal Block Assy, 120V, 1PH
	16190A-ISE	1	Terminal Block Assy, 220-240V, 1PH
	16190B-ISE	4	Terminal Block Assy, 3PH
13	13935	4	Top Cover Retainer Screw
14	13942	4	Tamperproof Screw (Not Shown)
	13625	1	Solenoid Valve - 24 Volt Coil (Not
	14494		Shown)

16190-ISE Terminal Block Assy, 120V, 1PH
16190A-ISE Terminal Block Assy, 220-240V, 1PH
16190B-ISE Terminal Block Assy, 3PH