EFF SERIES
Ceiling-Mounted Fan-Forced Heater





Technical Specifications:

Temp Range: 40°–90°F
CFM: 150
Grille Gauge: 14

Ideal Spaces:

Hallways
Lobbies
Entryways
Restrooms
Detention Environments

Beige

Choose these fan-forced ceiling heaters anywhere it makes sense to keep your heating solution out of the way and out of reach. A comfort solution for lobbies, restrooms and educational environments.

- Multiple mounting options: Recessed, Surface or T-Bar
- Accommodates pneumatic/electric or low voltage controls commonly used with BMS Systems
- Built in power on/off switch for safe, simple installation and maintenance
- When using wall thermostat, separate thermostat wiring is required
- Automatic fan delay eliminates cold drafts on start-up and discharges residual heat from the heater body during shut down
- Heavy duty 14-gauge louvered front cover grille with tamper-resistant screws provide added security and durability

Intertek

5 YEAR WARRANTY ELEMENT

1 YEAR WARRANTY WORKMANSHIP

EFF SERIES
Ceiling-Mounted Fan-Forced Heater

Scan the QR code to access additional specs and features

Models & Specifications:

	ITEM INFORMATION		ELECTRICAL DATA					
	CATALOG NO.	UPC	VOLTS	PHASE	WATTS	AMPS	BTU/HR.	SHIP WT.
◆	EFF1500	685360148106	120	1	1500	12.5	5120	23 lbs
◆	EFF3007	68536059075	277	1	3000/1500	10.8/5.4	10239/5120	23 lbs
◆	EFF4008	68536059136	208	1	4000/2000	19.2/9.8	13652/6826	23 lbs
◆	EFF4004	68536059099	240	1	4000/2000	16.7/14.4	13652/10239	23 lbs
			208	1	3000/1500		10239/5120	
◆	EFF4007	68536059129	277	1	4000/2000	14.4/12.5	13652/10239	23 lbs
			240	1	3000/1500		10239/5120	
◆	EFF4804	68536059167	240/208	1	4800/3600	20.0/17.3	16382/12287	23 lbs
◆	EFF4807	68536059198	277/240	1	4800/3600	17.3/15.0	16382/12287	23 lbs
●	EFF48483	685360155845	480	3	4800	5.8	16382	23 lbs
●	EFF48483LV	685360155869	480	3	4800	5.8	16382	23 lbs
●	EFF3003	68536021089	347	1	3000	8.6	10239	23 lbs
●	EFF3006	68536021096	600	1	3000	5	10239	23 lbs
●	EFF4003	68536021119	347	1	4000	11.5	13652	23 lbs
●	EFF4006	68536021140	600	1	4000	6.7	13652	23 lbs
●	EFF4803	68536021188	347	1	4800	13.8	16382	23 lbs
●	EFF4806	68536021218	600	1	4800	8	16382	23 lbs


SKU Legend: ◆ **= Popular Products;** ● **= Extended Offering** (Contact your local Marley Sales Representative for typically associated lead times)

NOTE: Factory-wired for highest wattage, field-convertible to lower wattages. Orders above 7500' sea level require special order

Optional Accessories:

CATALOG NO.	UPC	DESCRIPTION	COLOR	SHIP WT.
EFFSM	685360020983	Surface Mounting Sleeve	Beige	6 lbs
EFFR2 (24V)	685360020976	Time delay relay, 45–60 seconds to close when energized; Uses remote 24V or 120V power source	—	1 lbs
EFFR12 (120V)	685360020969			
EFFTBF	685360020990	T-Bar Frame Kit	—	4.5 lbs
EFFT1	685360021027	Single Pole T-Stat. (Field Installed)	—	1 lbs
EFFTR4	685360021003	208/240V Primary Transformer 24V Relay	—	1 lbs
EFFTR7	685360021010	277V Primary 24V Sec. Transformer Relay	—	1 lbs

Dimensions and Clearances:

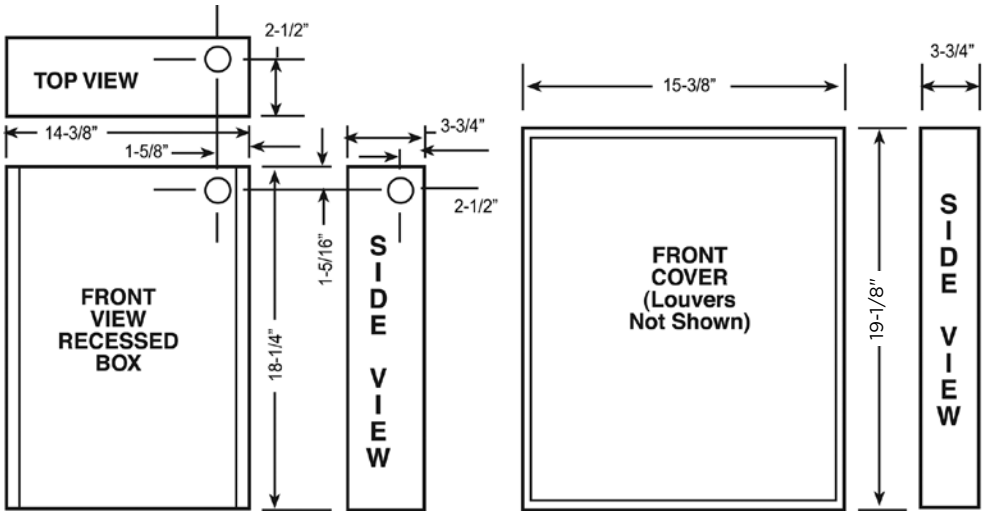

Suggested Controls



MS26 or M601W